

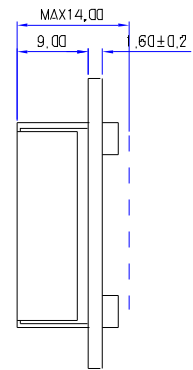


萬力電子有限公司
Wannli Electronic Co.,Ltd.

WGS-C161001

Version Modify Content

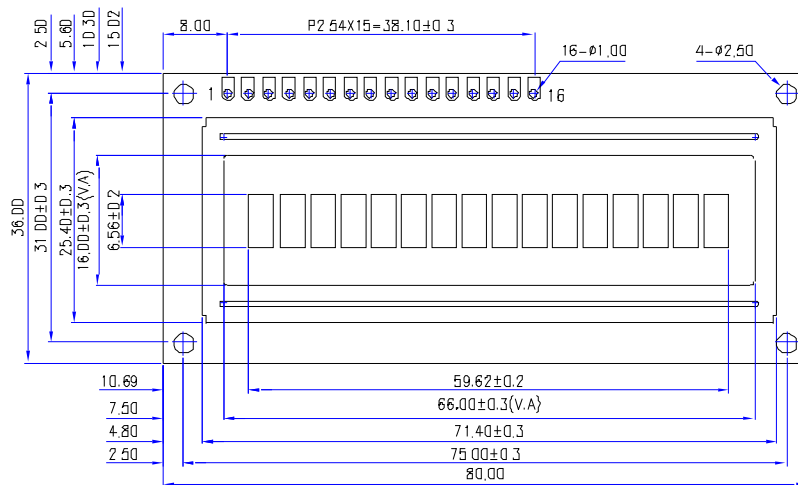

DISPLAY DATA ADDRESS:

Character	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Line	80	81	82	83	84	85	86	87	C0	C1	C2	C3	C4	C5	C6	C7

NOTES:

1. DISPLAY TYPE: STN, GRAY MODE, TRANSFLECTIVE/POSITIVE.
2. DRIVE METHOD: K50066 OR EQUIVALENT.
3. VIEWING DIRECTION: 6 O'CLOCK.
4. INTERFACE:

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
VSS	VDD	VO	R5	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	Vled	Vlss

5. OPERATING TEMP: 0 ~ 50°C.
6. STORAGE TEMP: -20°C ~ 60°C.

Unmarked Tolerance: ±0.5mm