


WGS-C40403

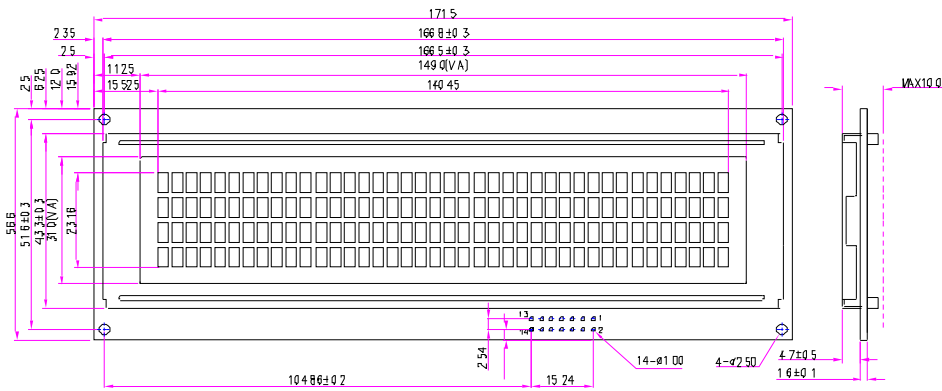

Display Data Address

Character	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
Line 1	00	01	02	03	04	05	06	07	08	09	0A	0B	0C	0D	0E	0F	10	11	12	13
Line 2	40	41	42	43	44	45	46	47	48	49	4A	4B	4C	4D	4E	4F	50	51	52	53
Line 3	00	01	02	03	04	05	06	07	08	09	0A	0B	0C	0D	0E	0F	20	21	22	23
Line 4	40	41	42	43	44	45	46	47	48	49	4A	4B	4C	4D	4E	4F	60	61	62	63
Character	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
Line 1	14	15	16	17	18	19	1A	1B	1C	1D	1E	1F	20	21	22	23	24	25	26	27
Line 2	64	65	66	67	68	69	6A	6B	6C	6D	6E	6F	80	81	82	83	84	85	86	87
Line 3	14	15	16	17	18	19	1A	1B	1C	1D	1E	1F	20	21	22	23	24	25	26	27
Line 4	64	65	66	67	68	69	6A	6B	6C	6D	6E	6F	80	81	82	83	84	85	86	87


Pin Connections

Pin No	1	2	3	4	5	6	7	8	9	10	11	12	13	14
Signal	VSS	VDD	VD	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7

NOTES

- 1 DISPLAY TYPE 1N, REFLECTIVE/POSITIVE
- 2 CONTROLLER/DRIVER=K90066UP24CC AND K90063B
- 3 VIEWING DIRECTION 6 O'CLOCK
- 4 OPERATING TEMP 0 ~ 50 C
- 5 STORAGE TEMP -20 C ~ 60 C

Display Pattern



Unmarked Tolerance±0.5mm