
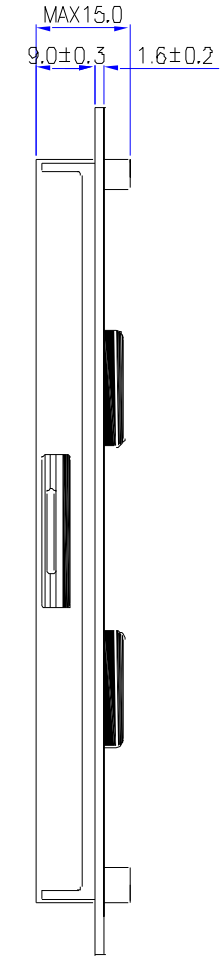



WGS-G16016001

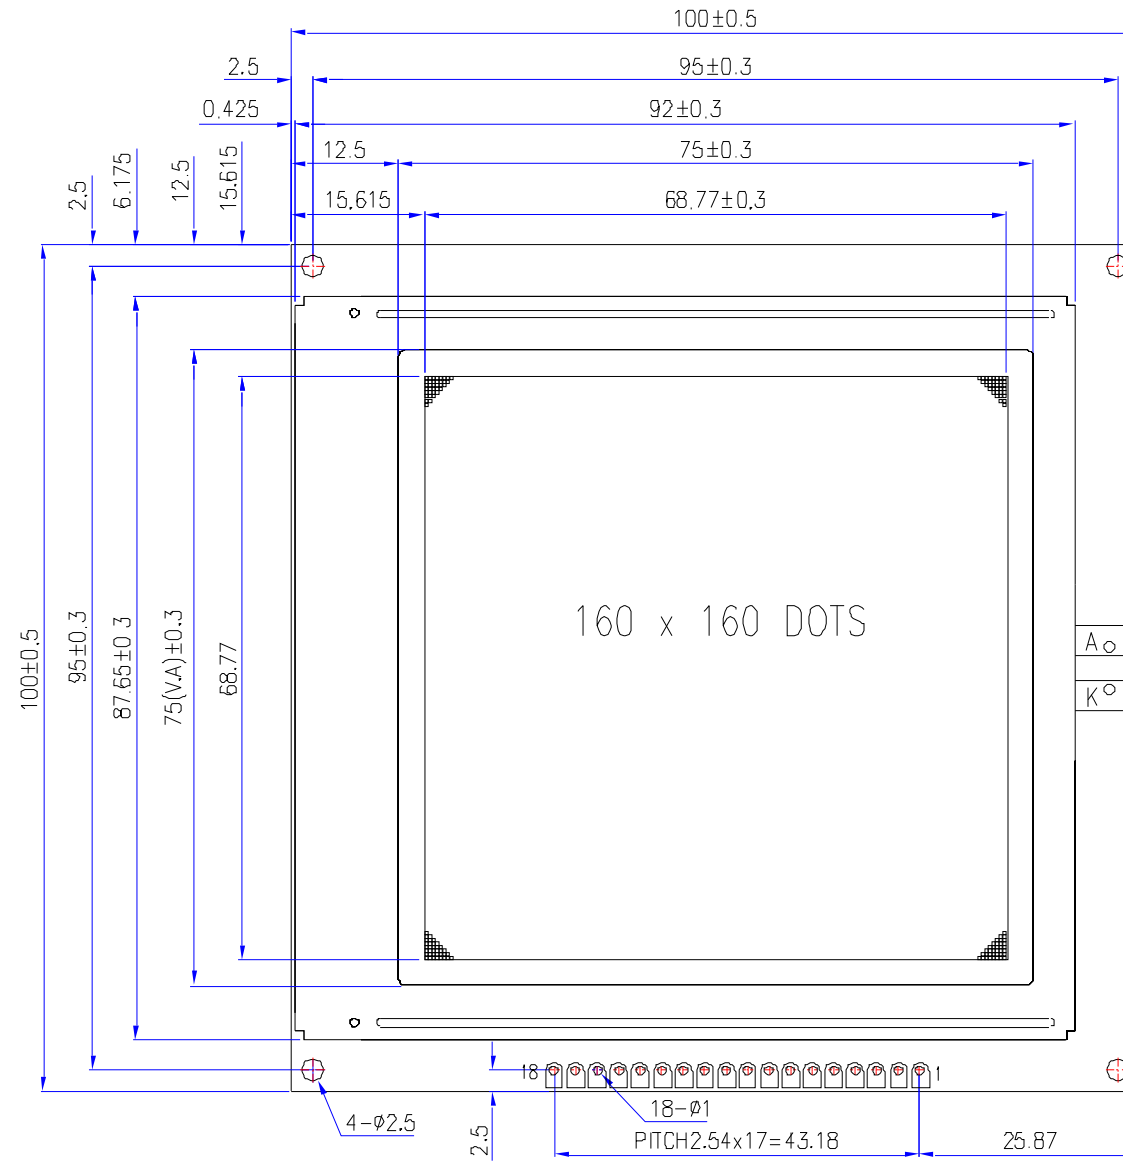

Pin Connections:

Pin NO.	Signal
1	GND
2	VDD
3	VO
4	WR
5	RD
6	CS
7	A0
8	RES
9	DB0
10	DB1
11	DB2
12	DB3
13	DB4
14	DB5
15	DB6
16	DB7
17	LEDK
18	LEDA

DISPLAY PATTERN



NOTES:

- 1.DISPLAY TYPE: 160X160 DOTS,1/160 DUTY,1/13.6 BIAS,VOP=18.3V.  
STN, YELLOW-GREEN MODE, TRANSFLECTIVE/POSITIVE.
2. CONTROLLER : SID13305
3. VIEWING DIRECTION: 6 O'CLOCK.
4. OPERATING TEMP: 0°C ~ +50°C
5. STORAGE TEMP: -20°C ~ +70°C.
6. LED BACKLIGHT: YELLOW-GREEN,BOTTOM
5. UNMARKED TOLERANCE:±0.5MM

VERSION      MODIFYCONTENT

APVL