


WGS-G24012801

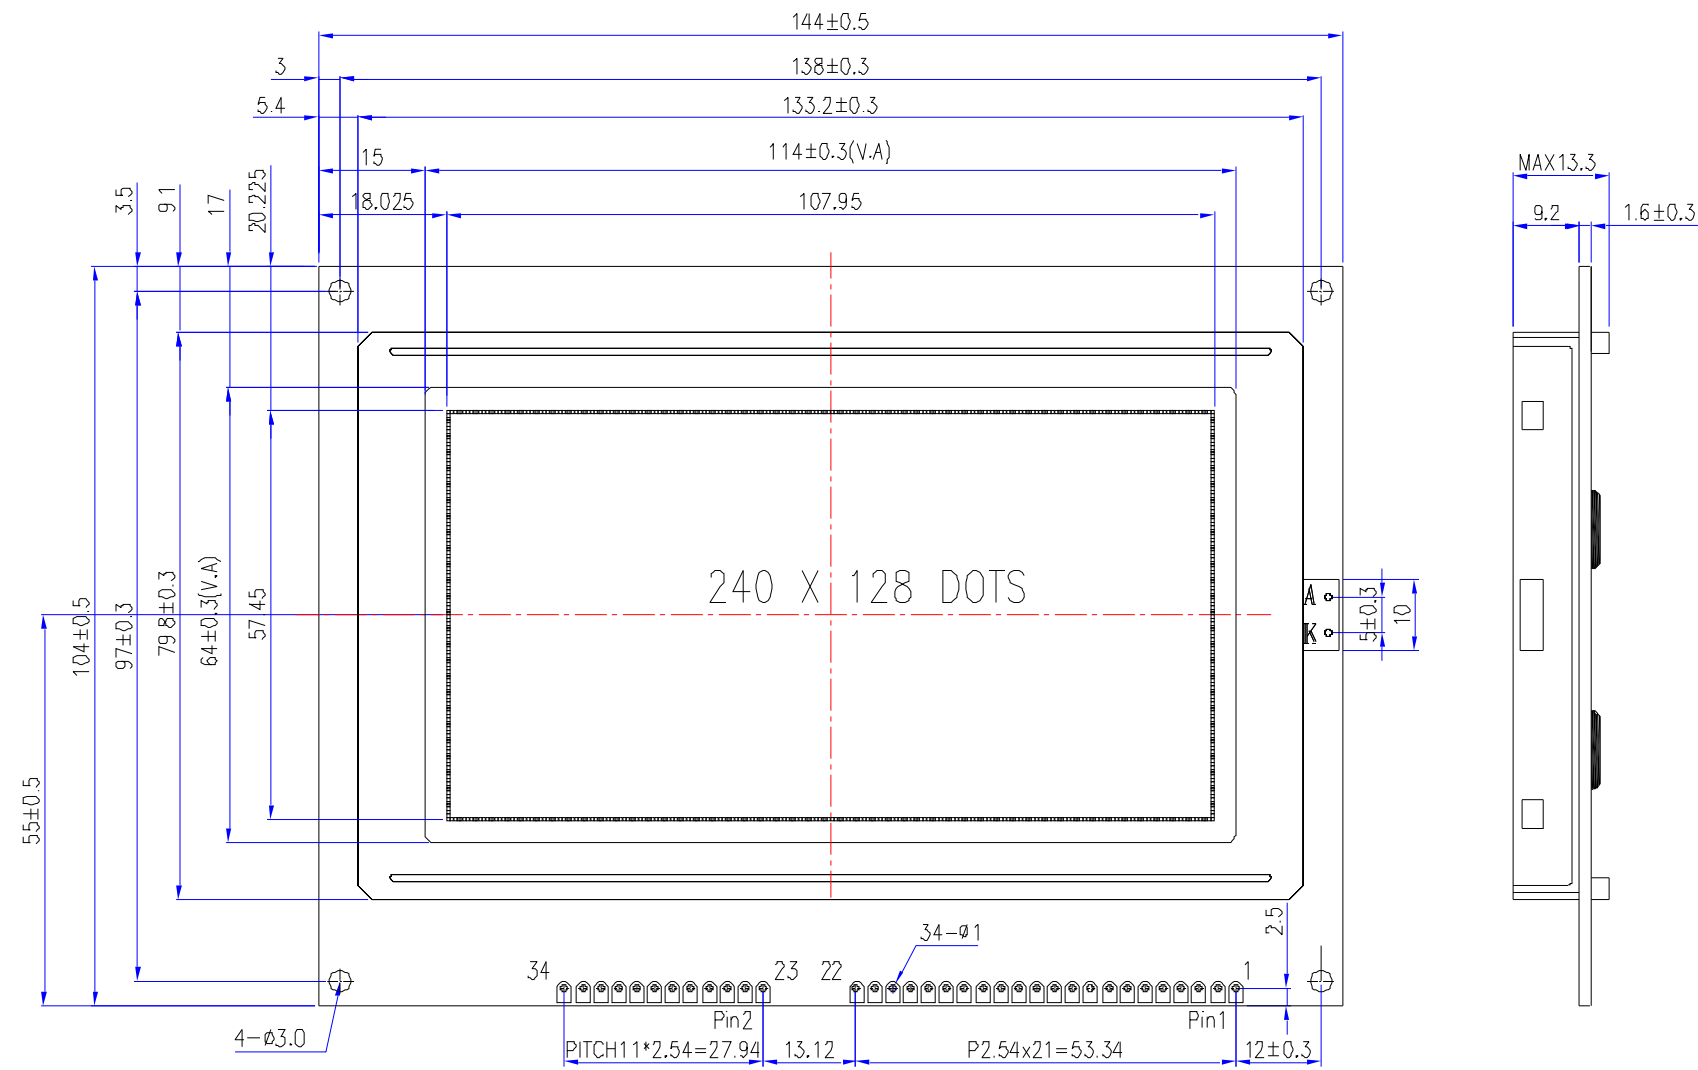

Pin1 Connections:

Pin NO.	Signal
1	FG
2	VSS
3	VDD
4	VO
5	/WR
6	/RD
7	/CE
8	C/D
9	NC
10	/RST
11	DB0
12	DB1
13	DB2
14	DB3
15	DB4
16	DB5
17	DB6
18	DB7
19	FS
20	Vout
21	LEDA
22	LEDK


Pin2 Connections:

Pin NO.	Signal
23	LEDK
24	LEDA
25	VOUT
26	VO
27	VSS
28	VDD
29	NC
30	HSCP
31	LP
32	FR
33	CDATA
34	ED

NOTES:

1. DISPLAY TYPE : 240X128 DOTS,1/128 DUTY,1/12BIAS.VOP=18.5V.
STN, YELLOW-GREEN MODE, TRANFLECTIVE/POSITIVE.
2. CONTROLLER: T6963C
3. VIEWING DIRECTION: 6 O'CLOCK.
4. OPERATING TEMP: -0°C ~ 50°C.
5. STORAGE TEMP: -20°C ~ 70°C.
6. LED BACKLIGHT: YELLOW-GREEN , EDGE
7. Unmarked Tolerance: ±0.5mm.

DISPLAY PATTERN



VERSION	MODIFYCONTENT
---------	---------------