# WGS-G1926403

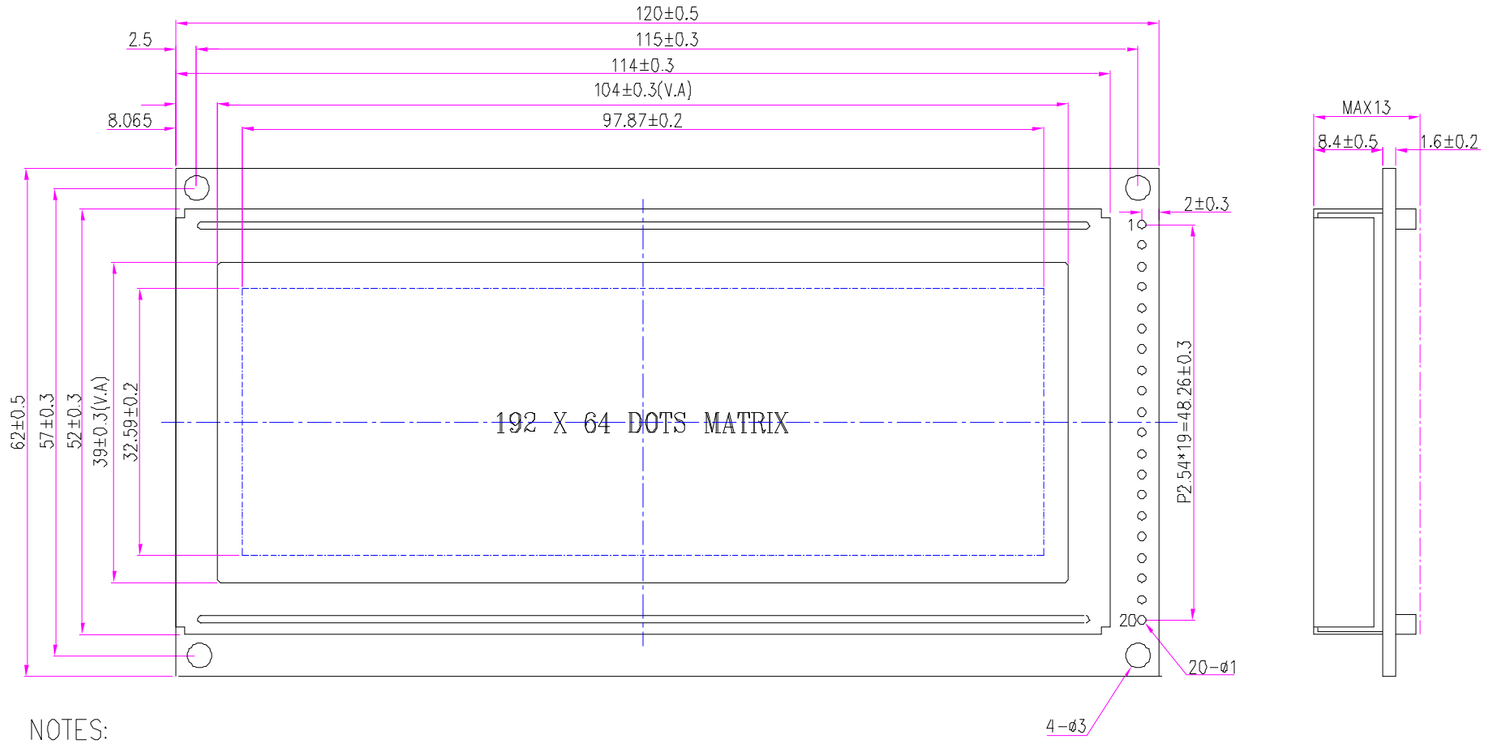


NOTES:

1. DISPLAY TYPE: STN, YELLOW-GREEN MODE.
   TRANSFLECTIVE/POSITIVE.
2. VIEWING DIRECTION: 6 O'CLOCK.
3. POLERATING TEMP: 0°C ~ +50°C.
4. STORAGE TEMP: -20°C ~ +60°C.
5. ALL UNMARKED TOLERANCES: ±0.5.
6. DRIVE METHOD: DUTY=1/64, BIAS=1/9
7. BACKLIGHT TYPE: LED BACKLIGHT, YELLOW.
8 LCD DRIVER: T6963 AND KS0086

DISPLAY PATTERN




PIN CONNECTION:

| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| VSS | VDD | VO | VEE | /WR | /RD | /CE | C/D | /RST | DB0 | DB1 | DB2 | DB3 | DB4 | DB5 | DB6 | DB7 | FS | VLED | VLSS |

| VERSION | MODIFYCONTENT |
|---|---|